


POWERED by  
**HONDA**™



## BENEFITS

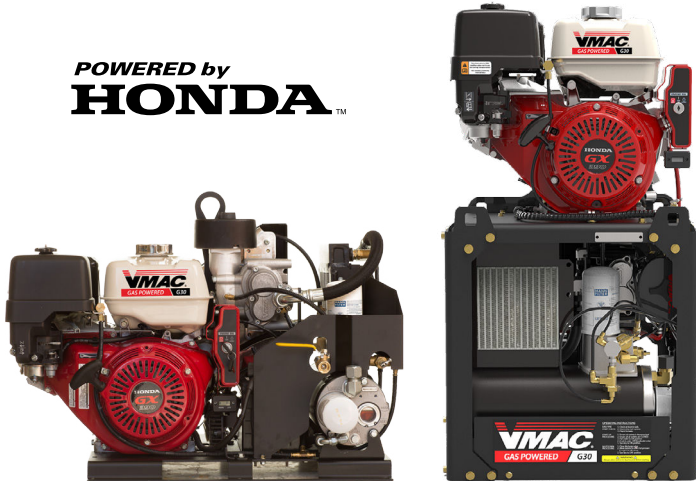

### 30 CFM, 100% Of The Time

VMAC G30 gas powered air compressors include a patented 30 CFM rotary screw air compressor designed to produce full air power, 100% of the time, so you don't need an air receiver tank. Get jobs done faster, without interruption.



### 60% Lighter

VMAC G30 gas powered air compressors are engineered and manufactured for mobile applications. Weighing only 205 lb, the VMAC G30 is up to 60% lighter than typical 22 – 30 CFM reciprocating gas engine driven air compressors with 30-gallon air receiver tank. Choosing a lightweight air compressor means you'll be able to add more tools and equipment to your truck, carry more materials, or take advantage of better fuel economy.



### 50% Smaller


VMAC air compressors feature the latest rotary screw technology integrated into a compact, turn-key package that is over 50% smaller than other competitive models. You can fit more tools, equipment and supplies on your truck, without hassle.

### Industry Leading Reliability

VMAC G30 gas powered air compressors are proven to work in extreme cold climates across North America when ordered with an optional, factory-installed cold climate kit. Engines supplied by Honda come with an industry-leading 3-year warranty and VMAC rotary screw air compressors come with the industry's first Lifetime Warranty (Limited).



## COMPONENTS

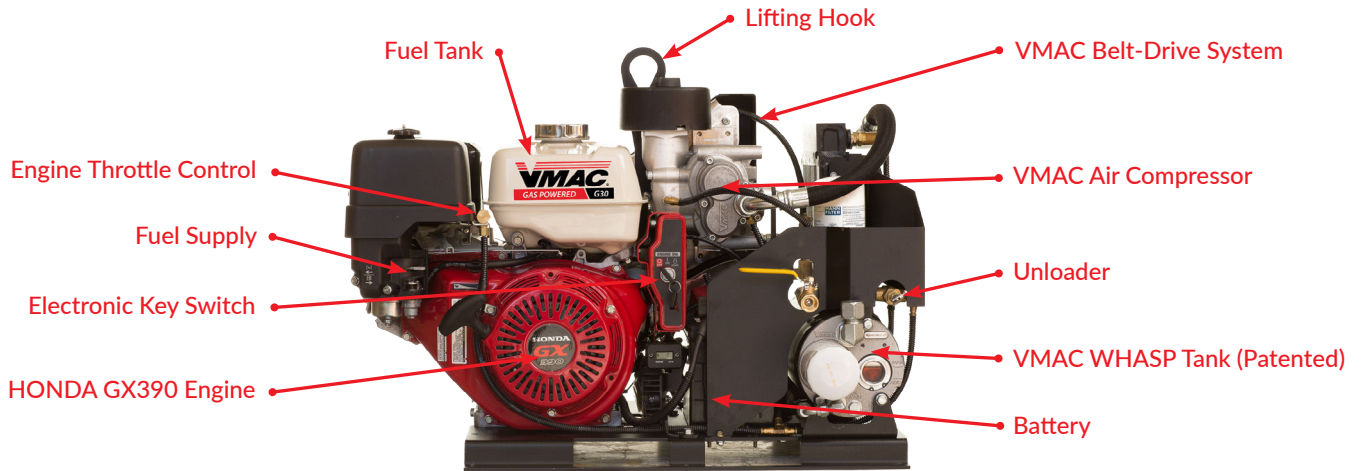

## SPECIFICATIONS

	STANDARD	STACKED
<b>Air Compressor Output</b>	30 CFM @ 100 psi (150 psi max)	
<b>Air Compressor Type</b>	Belt-driven, 100% duty cycle, VMAC oil-injected rotary screw	
<b>Engine</b>	Honda GX390 air cooled 4-stroke OHV with electric start, CARB and EPA certified, Honda approved application	
<b>Weight (wet)</b>	Approx. 205 lb (93 kg)	Approx. 210 lb (95 kg)
<b>Dimensions</b>	<ul style="list-style-type: none"> <li>» 33.5" (l) x 21.4" (w) x 23.9" (h); 85.1 cm (l) x 54.4 cm (w) x 60.7 cm (h)</li> <li>» Mounting Plate: 25.0" (l) x 19.125" (w) / 63.5 cm (l) x 48.6 cm (w)</li> </ul>	<ul style="list-style-type: none"> <li>» 20" (l) x 18" (w) x 38" (h); 50.8 cm (l) x 45.7 cm (w) x 96.5 cm (h)</li> <li>» Mounting Plate: 16.75" (l) x 10.75" (w) / 42.5 cm (l) x 27.3 cm (w)</li> </ul>
<b>Throttle Control</b>	2-speed throttle, responds to air demand	
<b>Battery (included)</b>	ACDelco 12V, 300 CCA, 360 CA	ACDelco 12V, 460 CCA, 575 CA
<b>Control System</b>	<ul style="list-style-type: none"> <li>» Key switch, choke, hour meter</li> <li>» Automatically idles down/up with air demand</li> <li>» Unloader decreases engine load, lowers sound levels, reduces fuel use and engine wear</li> </ul>	
<b>Safety Features</b>	<ul style="list-style-type: none"> <li>» Compressor thermal protection circuit</li> <li>» Automatic rapid blow-down valve on tank</li> <li>» 200 psi pressure relief valve</li> <li>» Low engine oil pressure shutoff</li> </ul>	
<b>Decibels (dB) @ 20 feet (6.1 meters)</b>	81 dB at high idle; 67 dB at low idle	
<b>Fuel Tank Capacity</b>	1.6-Gallons (6.1 L)	
<b>Air Receiver Tank (recommended for high duty cycle applications in hot climates)</b>	<ul style="list-style-type: none"> <li>» 10-Gallon Air Receiver Tank w/ Mounting Feet</li> <li>» 6-Gallon Air Receiver Wing Tank</li> <li>» Dual 6-Gallon Air Receiver Tanks (Base Mounted)</li> </ul>	
<b>Warranty</b>	Two years on all major components; VMAC air ends are covered by VMAC's Lifetime Warranty (Limited); Honda engine is covered by Honda's 3-Year Warranty.	